


Chapter 3


Uniform Plane Waves

Dr. Stuart Long

ECE 3317

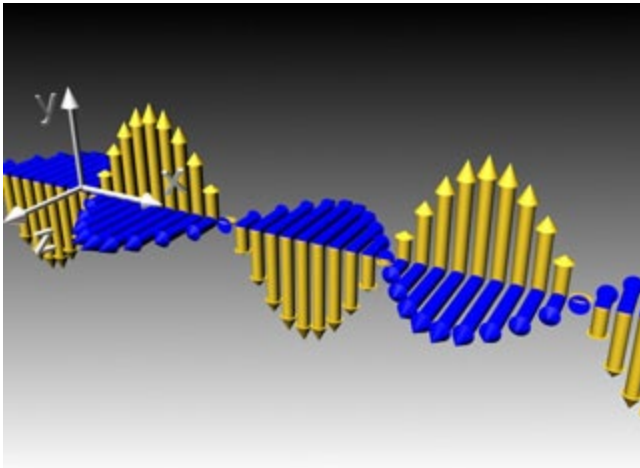

<http://www.physicsforums.com/showthread.php?t=261657>

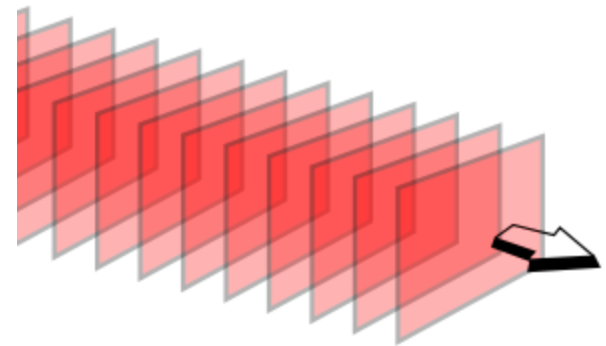


http://www.servinghistory.com/topics/Plane_wave

Wave – a mechanism by which a disturbance is propagated from one place to another

water, heat, sound, gravity, and **EM**
(radio, light, microwaves, UV, IR)

Notice how the media itself (**UH** fans in this case) is **NOT** propagated

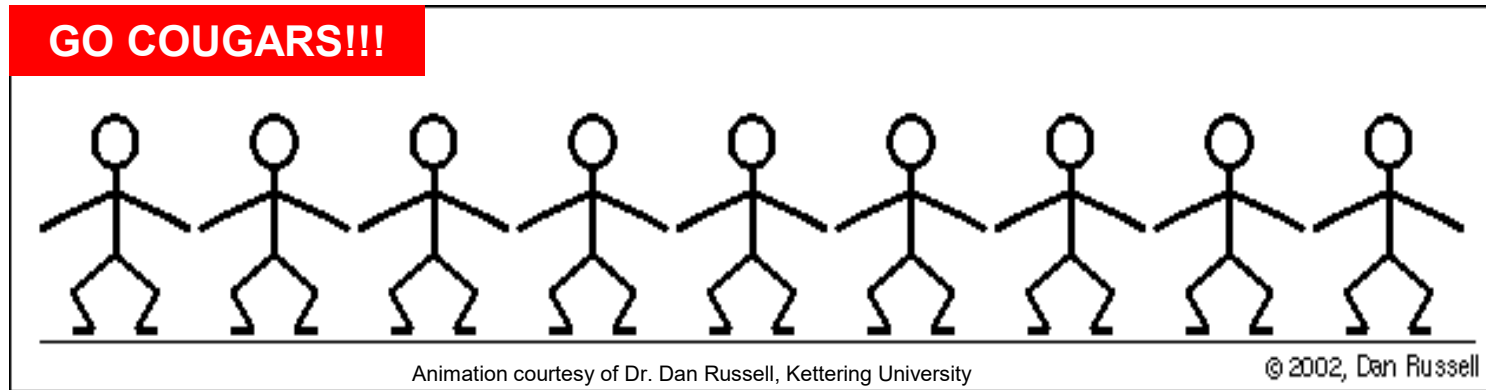

$$\left[\frac{\partial^2}{\partial x^2} - \frac{1}{v^2} \frac{\partial^2}{\partial t^2} \right] p(x, t) = 0$$

Given $p(x, 0) = f(x)$

A solution $p(x, t) = f(x - vt)$

Unique solution depends on physical problem

$$\frac{\partial^2}{\partial x^2} p(x, t) = f''$$

$$\frac{\partial^2}{\partial t^2} p(x, t) = v^2 f''$$

Time harmonic case $\frac{\partial}{\partial t} \Rightarrow j\omega$

$$\left[\frac{\partial^2}{\partial x^2} + \frac{\omega^2}{v^2} \right] p(x) = 0$$

Maxwell's Equations

$$\begin{aligned}\nabla \times \mathbf{E} &= -\frac{\partial \mathbf{B}}{\partial t} \\ \nabla \times \mathbf{H} &= \mathbf{J} + \frac{\partial \mathbf{D}}{\partial t} \\ \nabla \cdot \mathbf{B} &= 0 \\ \nabla \cdot \mathbf{D} &= \rho_v\end{aligned}$$

Source Free $\Rightarrow \rho_v = 0$; $\mathbf{J} = 0$

Time Harmonic case $\Rightarrow e^{j\omega t}$ Time dependent

Linear medium $\Rightarrow \mathbf{B} = \mu_0 \mathbf{H}$; $\mathbf{D} = \epsilon_0 \mathbf{E}$
(free space, vacuum, air)



Vector Identity $\nabla \times (\nabla \times \underline{\underline{\mathbf{E}}}) = \nabla(\nabla \cdot \underline{\underline{\mathbf{E}}}) - \nabla^2 \underline{\underline{\mathbf{E}}}$

$$-j\omega\mu_0(\nabla \times \underline{\underline{\mathbf{H}}}) = \nabla(\nabla \cdot \underline{\underline{\mathbf{E}}}) - \nabla^2 \underline{\underline{\mathbf{E}}}$$

$$-j\omega\mu_0(j\omega\varepsilon_0 \underline{\underline{\mathbf{E}}}) = 0 - \nabla^2 \underline{\underline{\mathbf{E}}}$$

$$\nabla^2 \underline{\underline{\mathbf{E}}} + \omega^2 \mu_0 \varepsilon_0 \underline{\underline{\mathbf{E}}} = 0 \quad \text{Wave equation for } \underline{\underline{\mathbf{E}}}$$

for $E = E_x \hat{\mathbf{x}}$ and $E_x(z)$


$$\frac{\partial^2 E_x}{\partial z^2} + \omega^2 \mu_0 \varepsilon_0 E_x = 0 \quad (1\text{-dim. case})$$

try soln of form $\underline{\underline{\mathbf{E}}} = \hat{\mathbf{x}} E_0 e^{-jkz}$

$$[-k^2 + \omega^2 \mu_0 \varepsilon_0] E_0 = 0$$

$$k^2 = \omega^2 \mu_0 \varepsilon_0 \quad \text{Dispersion Relation} \Rightarrow k = \omega \sqrt{\mu_0 \varepsilon_0}$$

$$E(z, t) = \text{Re} \left\{ \underline{\underline{\mathbf{E}}} e^{j\omega t} \right\} = \hat{\mathbf{x}} E_0 \cos(\omega t - kz)$$

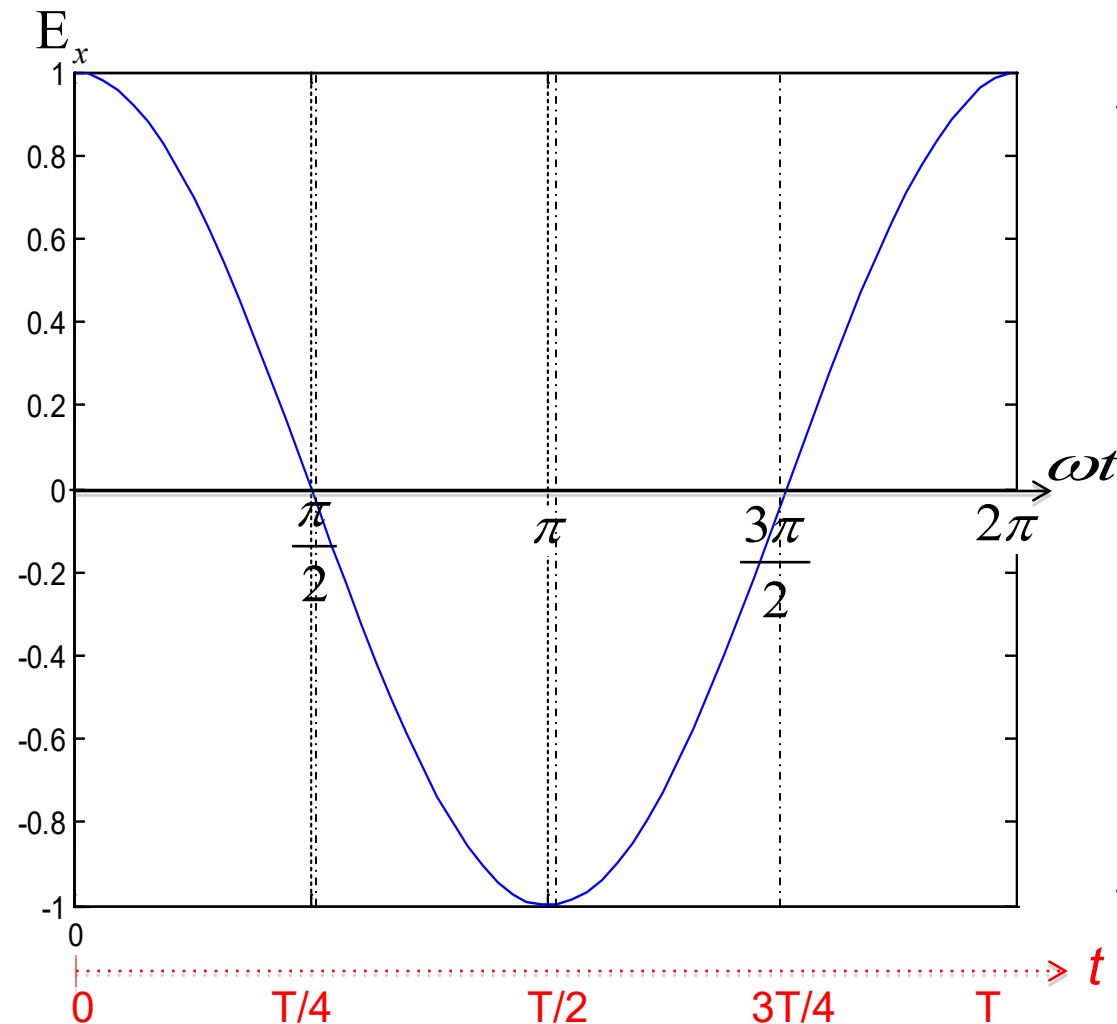

periodic in time
period T


$$E_x = E_0 \cos(\omega t)$$

x component of the
electric field at $z=0$
as a function of time

angular frequency $\omega = 2\pi f$

$$E_x = E_0 \cos(\omega t - kz)$$

Electric field as a function of z at different times

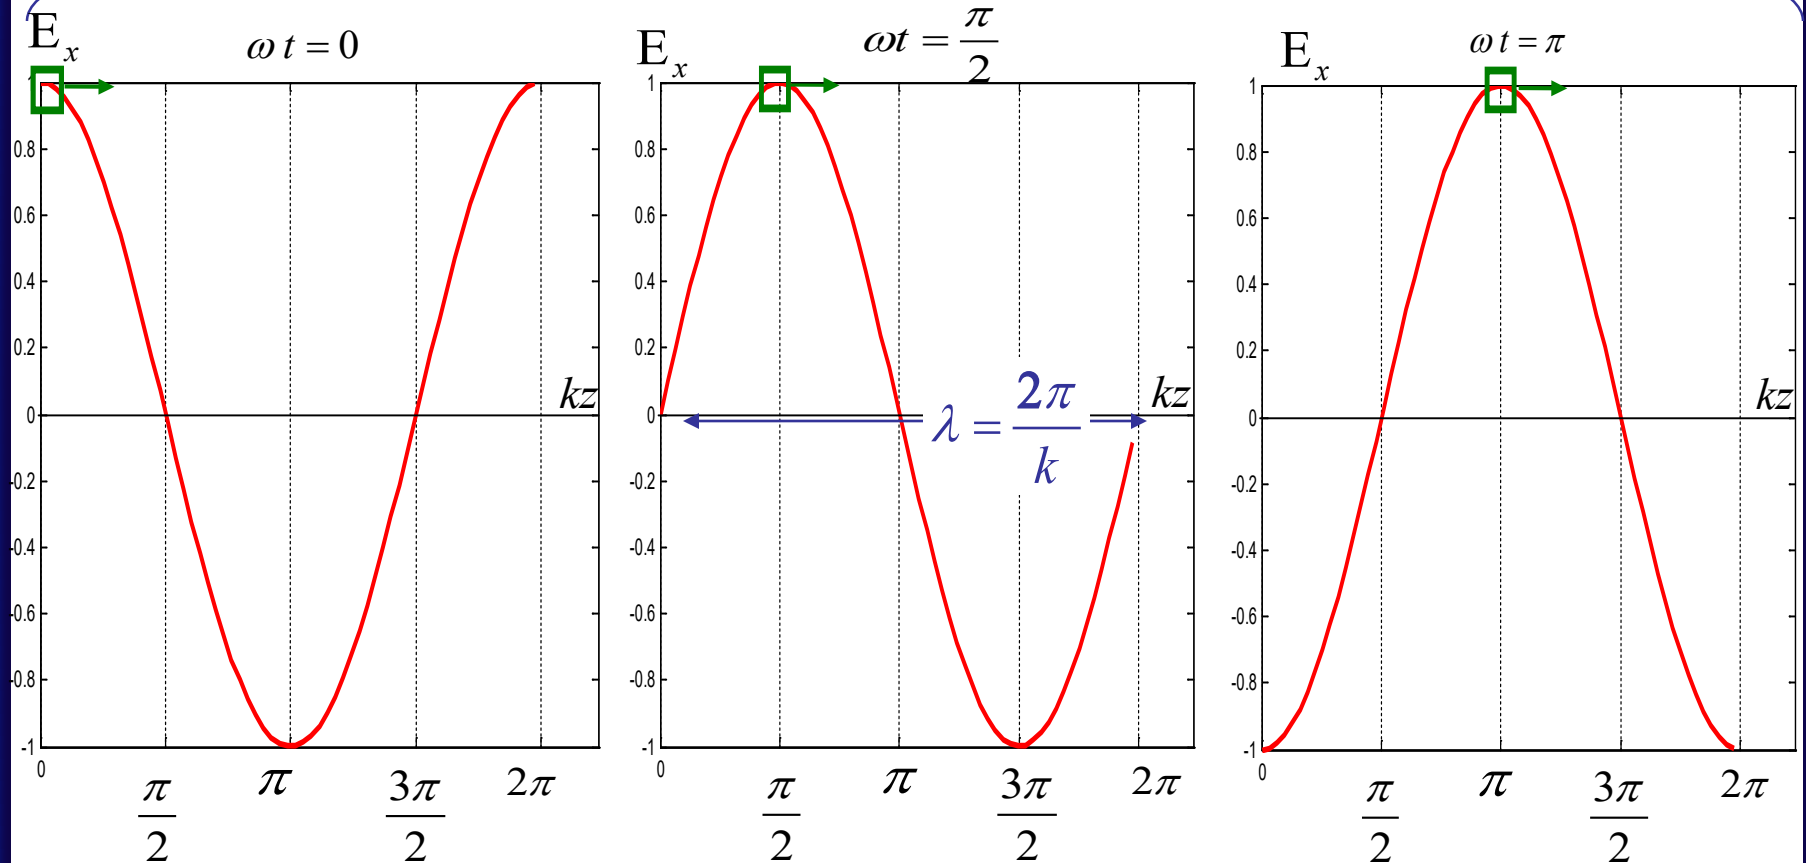

spatially repeating
every wavelength λ


$$\Delta(kz) = \pi \Rightarrow \Delta z = \frac{\pi}{k}$$

$$\Delta(\omega t) = \pi \Rightarrow \Delta t = \frac{\pi}{\omega}$$

$$\therefore v = \frac{\Delta z}{\Delta t} = \frac{\pi/k}{\pi/\omega} = \frac{\omega}{k}$$

$$E_x = E_0 \cos(\omega t - kz)$$

Electric field as a function of
 z at different times

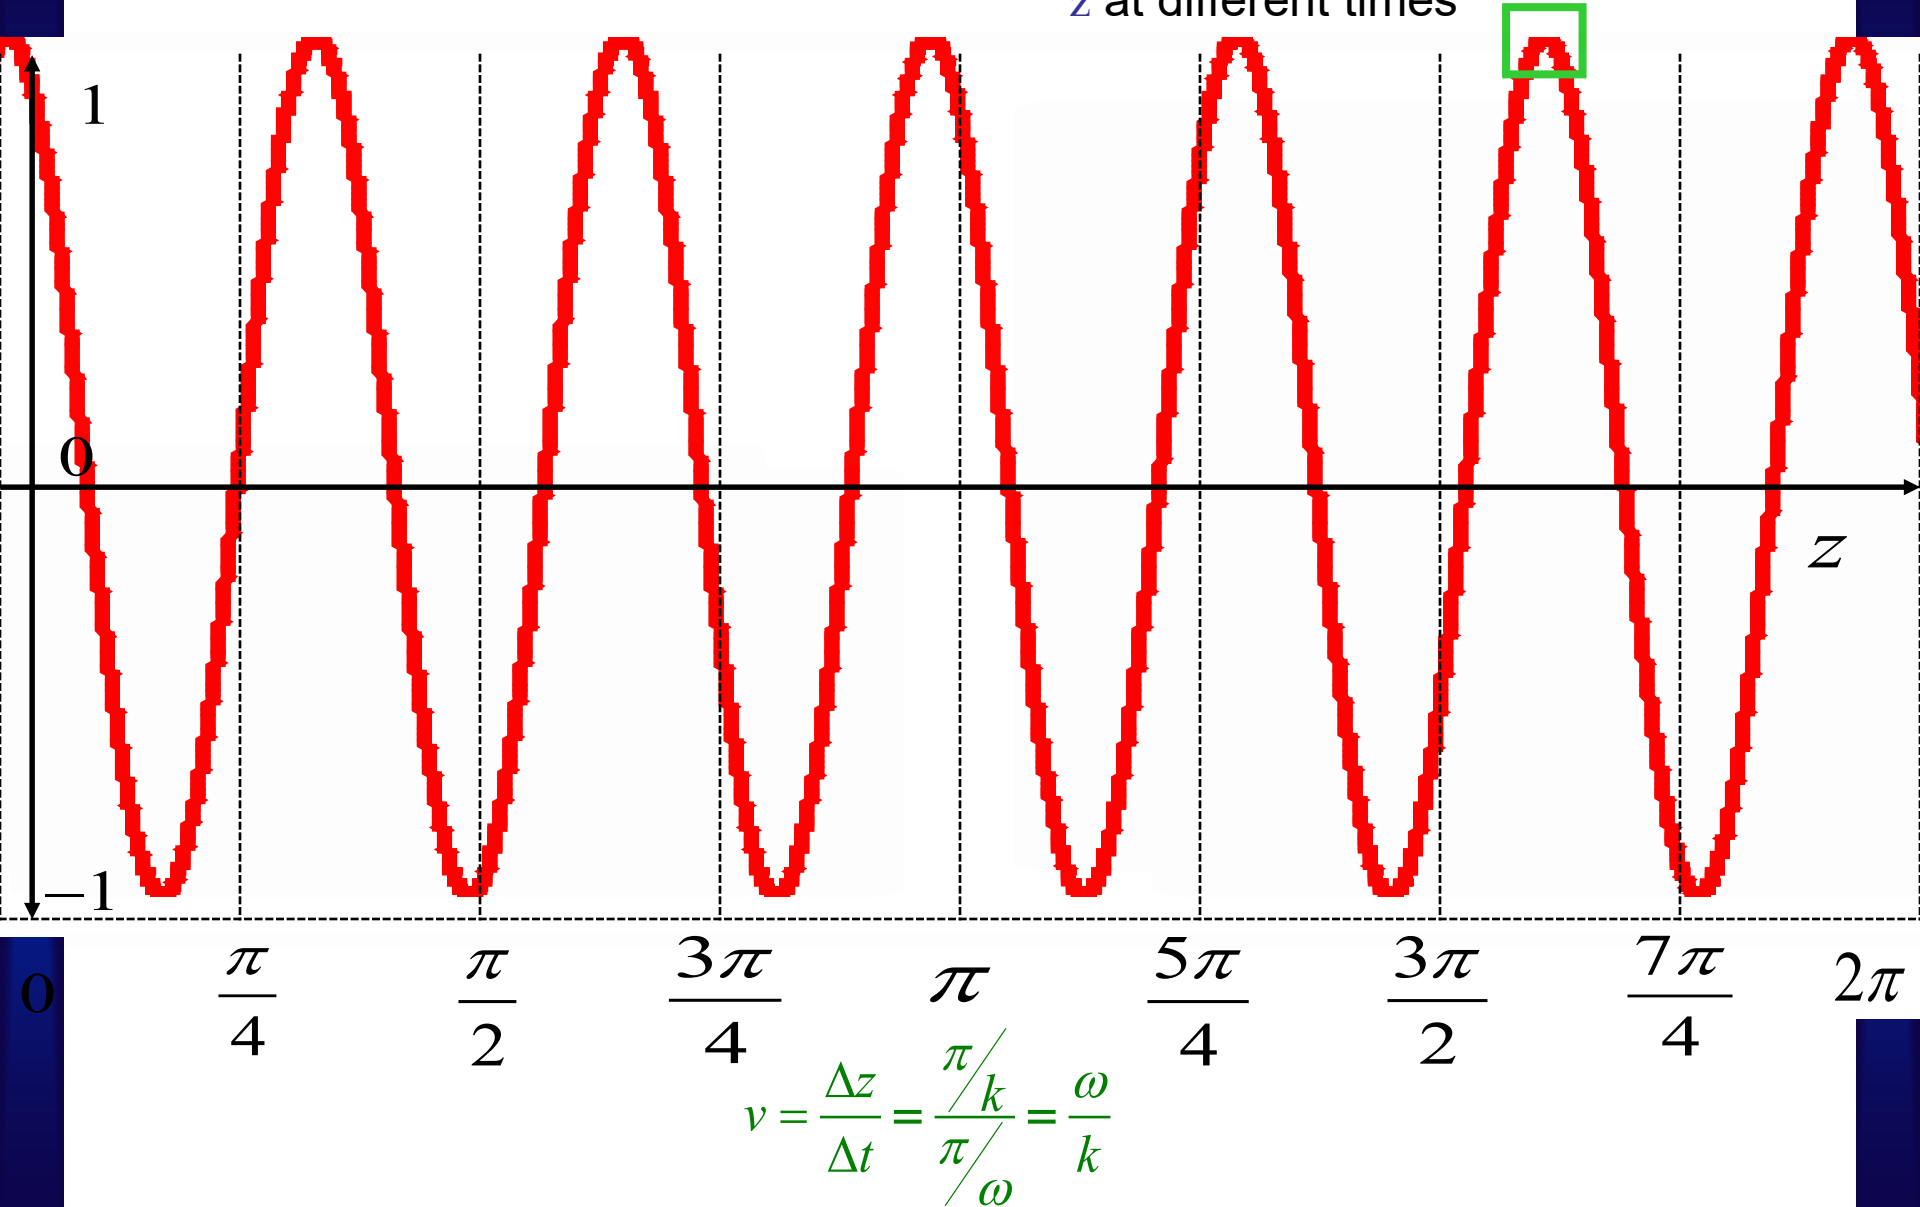

- The wave spatially repeats at a point $z = \lambda$ where $k\lambda = 2\pi$.
- The quantity λ , where $\lambda = \frac{2\pi}{k}$, is called the wavelength.
- The number of wavelengths contained in a spatial distribution of 2π is given by $k = \frac{2\pi}{\lambda}$ and it is called the wavenumber.
- The velocity of the peak of the wave (position of constant phase) requires that $\omega t - kz = [a \text{ constant}]$, (let's call that constant zero). So the velocity of propagation is then given by $\frac{\partial z}{\partial t} = v = \frac{\omega}{k} \left[\frac{m}{\text{sec}} \right]$
- The velocity in free space is given by $v = \frac{\omega}{k} = \frac{\omega}{\omega \sqrt{\mu_0 \epsilon_0}} = \frac{1}{\sqrt{\mu_0 \epsilon_0}} = 3 \times 10^8 \left[\frac{m}{\text{sec}} \right]$

Thus far we have a number of useful definitions:

Period	$T = \frac{1}{f}$	[sec]	Phase Velocity	$v = \frac{\omega}{k}$	[m/sec]
Angular Frequency	$\omega = 2\pi f$	[rad]	Velocity in free space	$c \approx 3 \times 10^8$	[m/sec]
Frequency	$f = \frac{1}{T}$	[Hz]	Wavenumber	$k = \omega \sqrt{\mu_0 \epsilon_0}$	[1/m]
Wavelength	$\lambda = \frac{2\pi}{k}$	[m]	Note: $f[\text{GHz}] \lambda[\text{cm}] \approx 30$		

Also, remember that the orientation of the **E** field of a uniform plane electromagnetic wave is perpendicular to the **H** field for that wave, and that both are perpendicular to the direction in which the wave propagates

Waves whose constant phase fronts are planar (plane waves) and whose amplitude (E_0) is uniform


Recall $\nabla \times \underline{\tilde{\mathbf{E}}} = -j\omega\mu_0 \underline{\tilde{\mathbf{H}}}$

Where the $\mathbf{E}$ field of a uniform plane wave is given by

$$\underline{\tilde{\mathbf{E}}} = \hat{\mathbf{x}} E_0 e^{-jkz}$$

The magnetic field is then

$$\underline{\tilde{\mathbf{H}}} = \hat{\mathbf{y}} \frac{E_0 e^{-jkz}}{\eta_0}$$

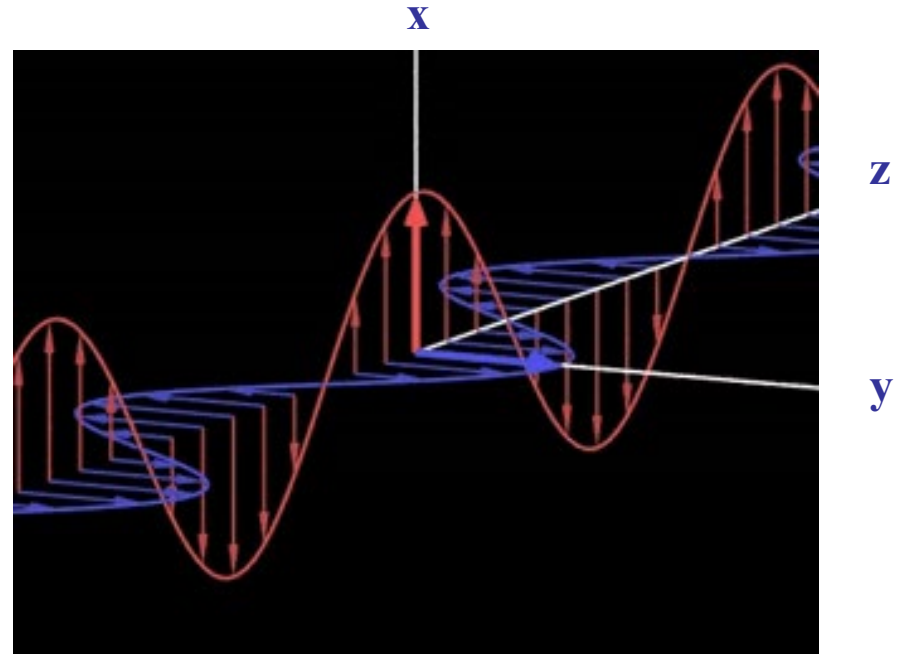


http://phys23p.sl.psu.edu/phys_anim/EM/indexer EMC.html

$\mathbf{E}$ field is in $\hat{\mathbf{x}}$ direction

$\mathbf{H}$ field is in $\hat{\mathbf{y}}$ direction

Wave propagating in $+\hat{\mathbf{z}}$ direction




Or in the time domain

$$\mathbf{E}(z, t) = \text{Re} \left\{ \tilde{\mathbf{E}} e^{j\omega t} \right\} \hat{\mathbf{x}} = \hat{\mathbf{x}} E_0 \cos(\omega t - kz)$$

Similarly

$$\mathbf{H}(z, t) = \text{Re} \left\{ \frac{\tilde{\mathbf{E}} e^{j\omega t}}{\eta_0} \right\} \hat{\mathbf{y}} = \hat{\mathbf{y}} \frac{E_0}{\eta_0} \cos(\omega t - kz)$$

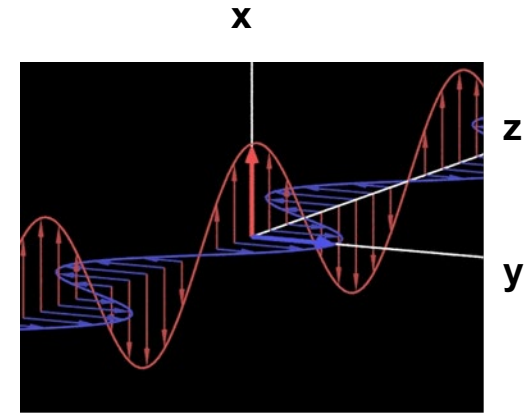

http://phys23p.sl.psu.edu/phys_anim/EM/indexer EMC.html


Where the η_0 is the intrinsic impedance of free space

$$\eta_0 = \sqrt{\frac{\mu_0}{\epsilon_0}} = 120\pi \approx 377 \text{ [Ohms]}$$

$$\text{Permittivity } \epsilon_0 \approx \frac{1}{36\pi} \times 10^{-9} \left[\frac{\text{F}}{\text{m}} \right]$$

$$\text{Permeability } \mu_0 = 4\pi \times 10^{-7} \left[\frac{\text{H}}{\text{m}} \right]$$

Source	Freq.[Hz]	Freq. (common units)	Wavelength [m]	Wavelength (common units)
U.S AC Power	60	60 Hz	5×10^6	5000 Km
ELF Submarine Communications	500	500 Hz	6×10^5	600 Km
AM radio	10^6	1000 Hz	300	300 m
CB radio	2.7×10^7	27 MHz	11	11 m
Early Cordless phone	4.9×10^7	49 MHz	6.1	6.1 m
TV ch. 2 (digital)	5.4×10^7	54 MHz	5.5	5 m
FM radio	10^8	100 MHz	3	3 m
TV ch. 8 (digital)	1.8×10^8	180 MHz	1.7	1.7 m
UHF Aircraft Comm.	5×10^8	500 MHz	.6	60 cm
TV ch. 39	6.2×10^8	620 MHz	.48	48 cm
Early Cell phone	8.7×10^8	870 MHz	.34	34 cm
μ -wave oven	2.45×10^9	2.45 GHz	.12	12 cm
"C" band	6×10^9	6 GHz	.05	5 cm
Police radar (X-band)	1.05×10^{10}	10.5 GHz	.0285	2.85 cm
mm wave	10^{11}	100 GHz	.003	3 mm
He-Ne Laser	4.7×10^{14}	470 THz	6.3×10^{-7}	6300 Å
Light	10^{15}	1 PHz	3×10^{-7}	3000 Å
X-ray	10^{18}	1 EHz	3×10^{-7}	3 Å

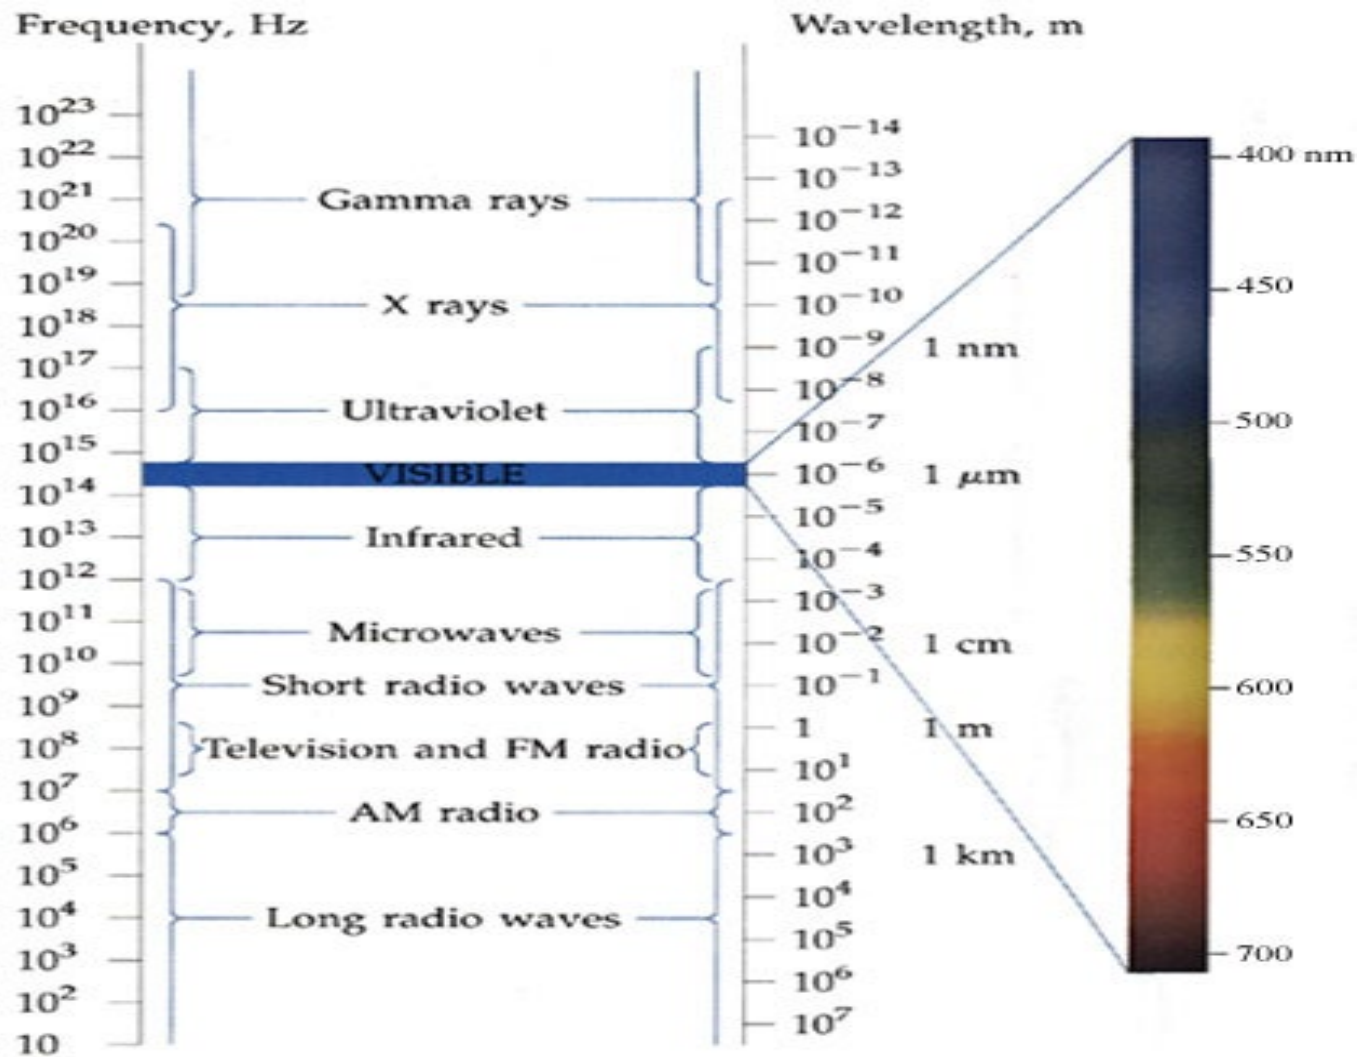


<http://www.impression5.org/solarenergy/misc/emspectrum.html>

Name	Wavelengths	Used for	Source
Radio Wave	1000 – 1 m	Radio, TV, Communications, Cellular phones	Radio transmitters, electric cables
Microwaves	1000 – 1 mm	Radar, telecom, microwave ovens, speed measuring	Klystrons, magnetrons, masers
Infrared (IR)	1000 – 0.8 μ	Radiation heaters, infrared heating, remote control	Hot objects, IR lamps, fires, LEDs, Laser
Visible Lights 	800 – 400 nm	Illumination, photography, imaging, holography	Light-bulbs, flash lamps, candles, LEDs, Laser
Ultraviolet (UV)	400 – 1 nm	Solarium, curing of plastics, sterilization	UV lamps, Lasers, accelerators
X-rays	1000 – 1 pm	X-raying, radiation treatment of tumors	X-rays tubes, accelerators
Gamma Rays	1000 – 1 fm	Radiation treatment of cancer, sterilization of food	Radioactive isotopes, particles accelerators




The **polarization** of a wave is described by the locus of the tip of the **E** vector as time progresses at a fixed point in space.

If locus is a straight line the wave is said to be **Linearly Polarized**





If locus is a circle the wave is said to be **Circularly Polarized**



If locus is an ellipse the wave is said to be **Elliptically Polarized**





If locus is a straight line
the wave is said to be
Linearly Polarized

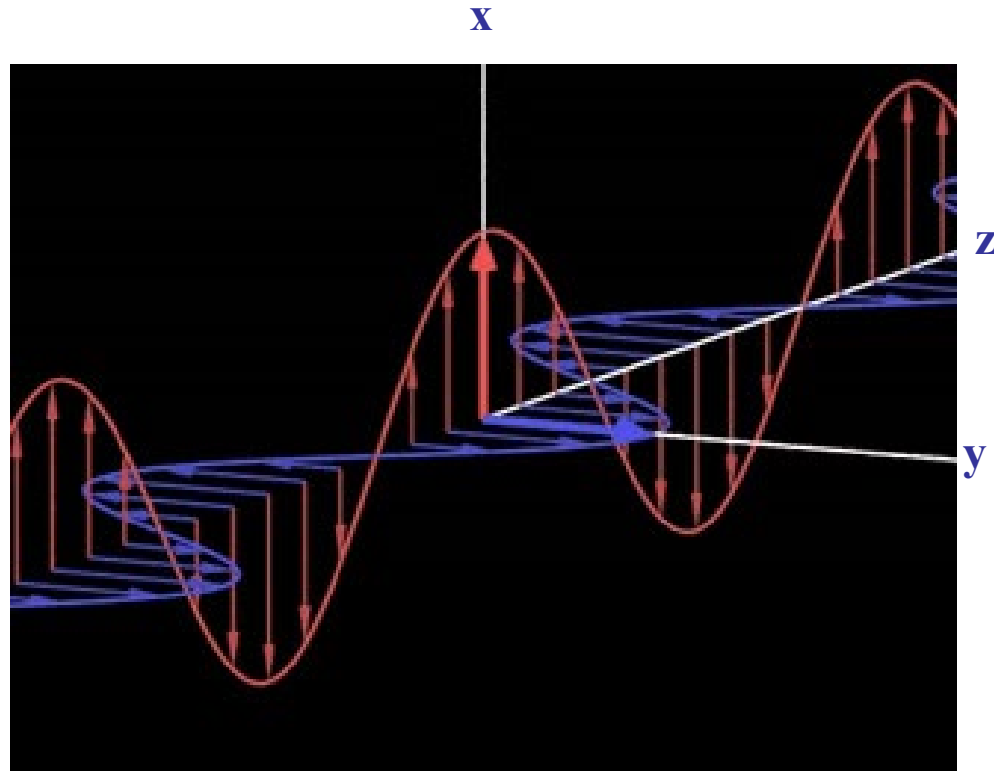



http://phys23p.sl.psu.edu/phys_anim/EM/indexer EMC.html

If locus is a circle the wave is said to be
Circularly Polarized

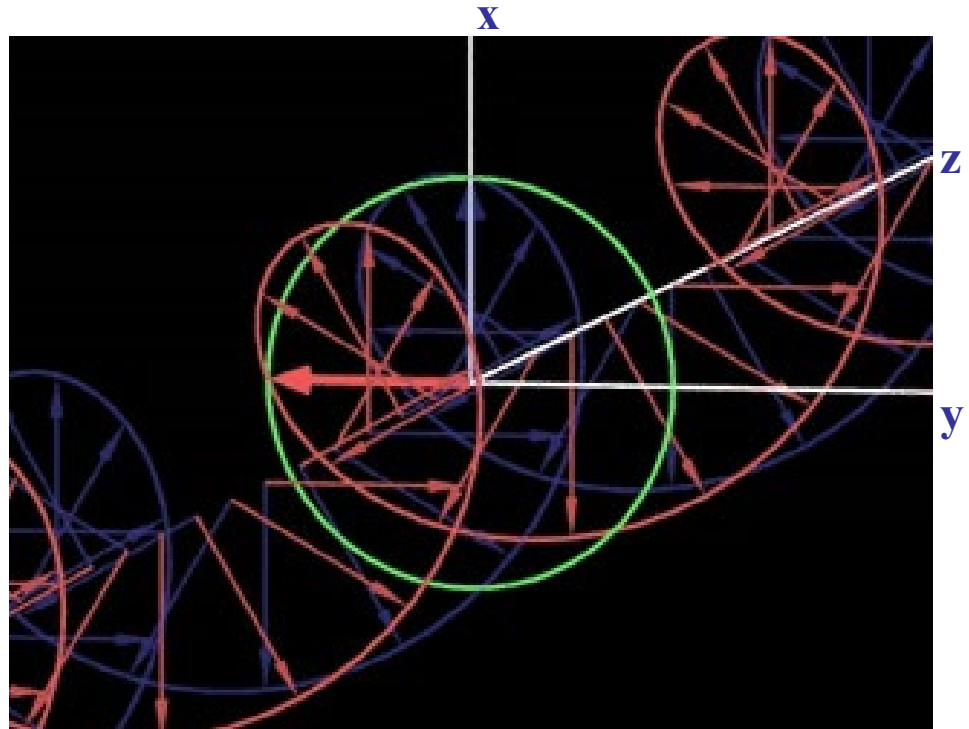

http://phys23p.sl.psu.edu/phys_anim/EM/indexer EMC.html

If locus is an ellipse the wave is said to be
Elliptically Polarized

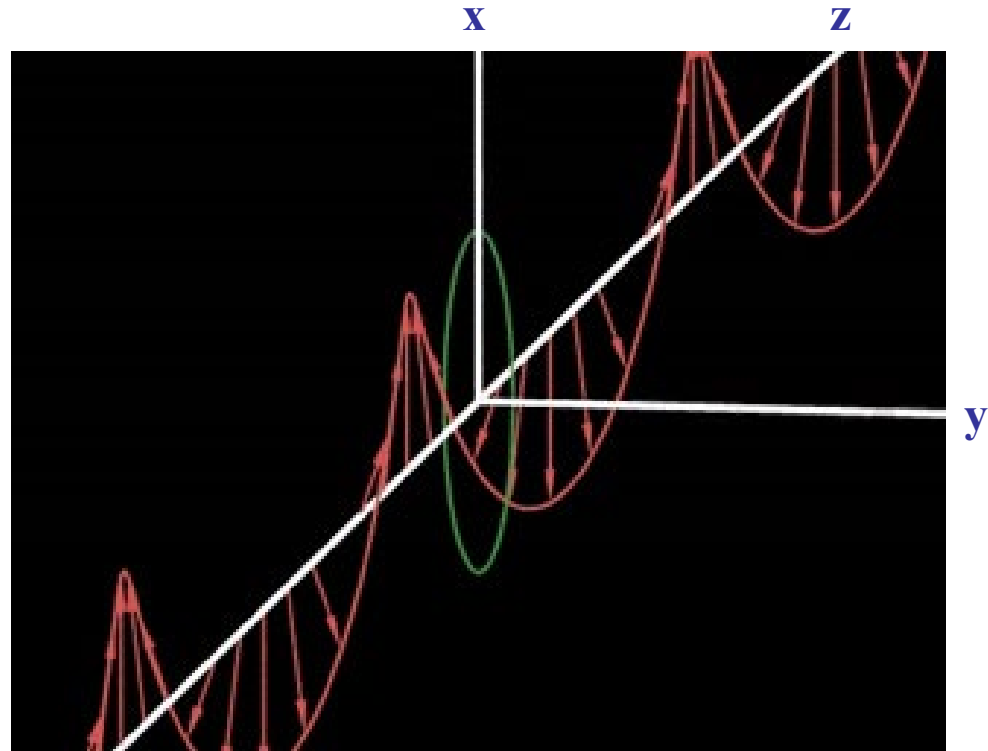

http://phys23p.sl.psu.edu/phys_anim/EM/indexer EMC.html

Consider a plane wave propagating in the **positive z** direction.

$$E = E_0 \cos(\omega t - kz)$$

The associated electric field can be expressed in the form of

$$E = \hat{x}E_x + \hat{y}E_y$$

where the two components are, in general terms,

$$\begin{cases} E_x = a \cos(\omega t - kz + \phi_a) \\ E_y = b \cos(\omega t - kz + \phi_b) \end{cases}$$

The complex representation is given can be expressed by

$$\underline{\tilde{E}} = \hat{x} a e^{-j(kz - \phi_a)} + \hat{y} b e^{-j(kz - \phi_b)}$$

Look at $z = 0$ and $\phi_b = \phi$; $\phi_a = 0$

$$E_x = a \cos \omega t$$

$$E_y = b \cos(\omega t + \phi)$$

$$\left(\frac{E_x}{a}\right)^2 - 2\left(\frac{E_x E_y}{ab}\right) \cos \phi + \left(\frac{E_y}{b}\right)^2 = \sin^2 \phi$$

Recall that the general quadratic equation is given by

$$Ax^2 + Bxy + Cy^2 + Dx + Ey + F = 0$$

where

$$A = \frac{1}{a^2} \quad ; \quad B = -\frac{2 \cos \phi}{ab} \quad ; \quad C = \frac{1}{b^2} \quad ; \quad D = 0 \quad ; \quad E = 0 \quad ; \quad F = -\sin^2 \phi$$

$$Ax^2 + Bxy + Cy^2 + Dx + Ey + F = 0$$

where

$$A = \frac{1}{a^2} ; B = -\frac{2\cos\phi}{ab} ; C = \frac{1}{b^2} ; D = 0 ; E = 0 ; F = -\sin^2\phi$$

If $B^2 - 4AC < 0$ this becomes equation of an ellipse

$$\cos^2\phi\left(-\frac{2}{ab}\right)^2 - 4\left(\frac{1}{a^2}\right)\left(\frac{1}{b^2}\right) = \frac{4}{a^2b^2}(\cos^2\phi - 1) \leq 0$$

rotated by an angle $\theta \Rightarrow \cot 2\theta = \frac{A - C}{B}$

$$\cot 2\theta = \left[\frac{1}{a^2} - \frac{1}{b^2} \right] \left[\frac{ab}{-2\cos\phi} \right]$$

Let $\phi = 0$ (or $\phi = \pi$)


$$\left(\frac{E_x}{a}\right)^2 - 2\left(\frac{E_x E_y}{ab}\right)\cos\phi + \left(\frac{E_y}{b}\right)^2 = \sin^2\phi$$

$$\left(\frac{E_x}{a}\right)^2 - 2\left(\frac{E_x E_y}{ab}\right) + \left(\frac{E_y}{b}\right)^2 = 0 \Rightarrow \left(\frac{E_x}{a} - \frac{E_y}{b}\right)^2 = 0$$

$$\frac{E_x}{a} = \frac{E_y}{b} \Rightarrow E_y = \frac{b}{a} E_x$$

Linear polarization

(line of slope b/a)




$$\text{Let } a = b \ ; \ \phi = \frac{\pi}{2}$$

$$\left(\frac{E_x}{a}\right)^2 - 2\left(\frac{E_x E_y}{ab}\right)\cos\phi + \left(\frac{E_y}{b}\right)^2 = \sin^2\phi$$

$$\left(\frac{E_x}{a}\right)^2 + \left(\frac{E_y}{a}\right)^2 = 1$$


Circular polarization (circle of radius " a ")



$$\text{Let } b = 2a \quad ; \quad \phi = \frac{\pi}{2}$$

$$\left(\frac{E_x}{a}\right)^2 - 2\left(\frac{E_x E_y}{ab}\right)\cos\phi + \left(\frac{E_y}{b}\right)^2 = \sin^2\phi$$

$$\left(\frac{E_x}{a}\right)^2 + \left(\frac{E_y}{2a}\right)^2 = 1$$

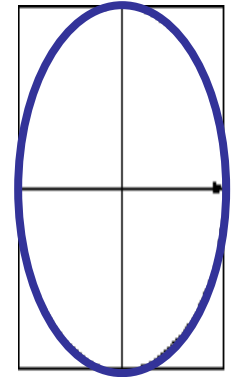

Elliptical polarization (equation of an ellipse
with major radius = $2a$ and minor radius = a)





Consider a plane wave propagating in the **positive z** direction.

$$\mathbf{E} = E_0 \cos(\omega t - kz)$$

The associated electric field can be expressed in the form of

$$\mathbf{E} = \hat{\mathbf{x}}E_x + \hat{\mathbf{y}}E_y$$

where the two components are, in general terms,

$$\begin{cases} E_x = a \cos(\omega t - kz + \phi_a) \\ E_y = b \cos(\omega t - kz + \phi_b) \end{cases}$$

The **polarization** of this plane wave is determined by the quantity

$$\frac{E_y}{E_x} = A \angle \phi$$

Where

$$A = \frac{|E_y|}{|E_x|} = \frac{b}{a} \quad \text{and} \quad \phi = \phi_b - \phi_a$$

If **E** field is traveling in the **positive** $\hat{y}$, $\hat{x}$ or $\hat{z}$ direction $A\angle\phi$ can be found respectively by

$$\frac{E_x\angle\phi_x}{E_z\angle\phi_z} \text{ or } \frac{E_z\angle\phi_z}{E_y\angle\phi_y} \text{ or } \frac{E_y\angle\phi_y}{E_x\angle\phi_x}$$

$A = 0 \quad ; \quad \phi = 0 \text{ or } \pm\pi$	Linear Polarization (LP)
---	--------------------------

$A \rightarrow \infty$	Linear Polarization (LP)
------------------------	--------------------------

$A = 1 \quad ; \quad \phi = \pi/2$	Left-Hand Circular Polarization (LHCP)
------------------------------------	--

$A = 1 \quad ; \quad \phi = -\pi/2$	Right-Hand Circular Polarization (RHCP)
-------------------------------------	---

$0 < \phi < \pi$	Left-Hand Elliptical Polarization (LHEP)
------------------	--

$-\pi < \phi < 0$	Right-Hand Elliptical Polarization (RHEP)
-------------------	---

Find the polarization of the following field

$$(a) \quad \underline{\mathbf{E}} = (j\hat{x} + \hat{y})e^{-jkz}$$

$$\mathbf{E}(t) = \text{Re} \left[(j\hat{x} + \hat{y}) (\cos(\omega t - kz) + j \sin(\omega t - kz)) \right]$$


$$\mathbf{E}(t) = \hat{y} \cos(\omega t - kz) - \hat{x} \sin(\omega t - kz)$$

$$\text{at } z = 0$$

$$\mathbf{E}(t) = \hat{y} \cos(\omega t) - \hat{x} \sin(\omega t)$$

$$\text{at } \omega t = 0 \quad \mathbf{E}(0) = \hat{y}$$

$$\text{at } \omega t = \pi / 2 \quad \mathbf{E}(\pi / 2) = -\hat{x}$$

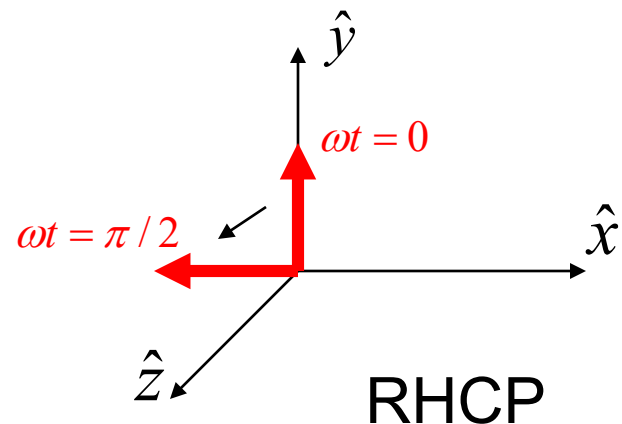

Another way to find polarization (Shen and Kong method)...

$$\tilde{\mathbf{E}} = (j\hat{x} + \hat{y})e^{-jkz}$$

$$E_x = (1\angle -kz + 90^\circ)$$

$$E_y = (1\angle -kz)$$

$$\begin{aligned} A\angle\phi &= \frac{E_y}{E_x} = \frac{(1\angle -kz)}{(1\angle -kz + 90^\circ)} \\ &= \frac{|1|}{|1|} \angle -kz - (-kz + 90^\circ) \end{aligned}$$

$$A\angle\phi = 1\angle -90^\circ \Rightarrow RHCP$$

Polarization Example

Find the polarization of the following field (Dr. Long's Way)

$$(b) \quad \tilde{\mathbf{E}} = \left[(2 + j)\hat{x} + (3 - j)\hat{z} \right] e^{-jky}$$

$$\mathbf{E}(t) = \text{Re} \left[\left((2 + j)\hat{x} + (3 - j)\hat{z} \right) \left(\cos(\omega t - ky) + j \sin(\omega t - ky) \right) \right]$$


$$\mathbf{E}(t) = \hat{x} \left[2 \cos(\omega t - ky) - \sin(\omega t - ky) \right] + \hat{z} \left[3 \cos(\omega t - ky) + \sin(\omega t - ky) \right]$$

at $y = 0$

$$\mathbf{E}(t) = \hat{x} \left[2 \cos(\omega t) - \sin(\omega t) \right] + \hat{z} \left[3 \cos(\omega t) + \sin(\omega t) \right]$$

$$\text{at } \omega t = 0 \quad \mathbf{E}(0) = 2\hat{x} + 3\hat{z}$$

$$\text{at } \omega t = \pi / 2 \quad \mathbf{E}(\pi / 2) = -\hat{x} + \hat{z}$$

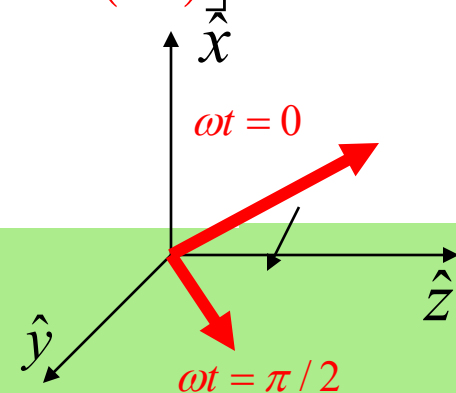

LHEP

Polarization Example

3-34

Another way to find polarization (Shen and Kong method)...

$$\tilde{\mathbf{E}} = ((2 + j)\hat{x} + (3 - j)\hat{z})e^{-jky}$$

$$E_x = (\sqrt{5} \angle -ky + 26.5651^\circ)$$

$$E_z = (\sqrt{10} \angle -ky - 18.4349^\circ)$$

$$\begin{aligned} A \angle \phi &= \frac{E_x}{E_z} = \frac{(\sqrt{5} \angle -ky + 26.5651^\circ)}{(\sqrt{10} \angle -ky - 18.4349^\circ)} \\ &= \frac{|\sqrt{5}|}{|\sqrt{10}|} \angle -ky + 26.5651^\circ - (-ky - 18.4349^\circ) \end{aligned}$$

$$A \angle \phi = \frac{1}{\sqrt{2}} \angle 45^\circ \Rightarrow LHEP$$

Find the polarization of the following field

$$(c) \quad \tilde{\mathbf{E}} = ((1 + j)\hat{y} + (1 - j)\hat{z})e^{-jkx}$$

$$E_y = (\sqrt{2} \angle -kx + 45^\circ)$$

$$E_z = (\sqrt{2} \angle -kx - 45^\circ)$$

$$\begin{aligned} A \angle \phi &= \frac{E_z}{E_y} = \frac{(\sqrt{2} \angle -kx - 45^\circ)}{(\sqrt{2} \angle -kx + 45^\circ)} \\ &= \frac{|\sqrt{2}|}{|\sqrt{2}|} \angle -kx - 45^\circ - (-kx - 45^\circ) \end{aligned}$$

$$A \angle \phi = 1 \angle -90^\circ \Rightarrow RHCP$$

For isotropic conductors Ohm's Law states that

$$\underline{\mathbf{J}}_c = \sigma \underline{\mathbf{E}}$$

where $\underline{\mathbf{J}}_c$ conduction current ; σ conductivity $\left[\frac{\text{mho}}{\text{m}} \right]$

$\underline{\mathbf{J}}_0$ source current

Consequently Ampere's Law becomes

$$\nabla \times \underline{\mathbf{H}} = j\omega \underline{\mathbf{D}} + \underline{\mathbf{J}}_c + \underline{\mathbf{J}}_0$$

$$\nabla \times \underline{\mathbf{H}} = j\omega \left[\epsilon - j \frac{\sigma}{\omega} \right] \underline{\mathbf{E}} + \underline{\mathbf{J}}_0$$

Where

$$\underline{\xi} = \epsilon - j \frac{\sigma}{\omega} \quad \text{Complex Permittivity}$$

In a source free dissipative medium ($\underline{\mathbf{J}}=0$) Ampere's Law states

$$\nabla \times \underline{\mathbf{H}} = j\omega \underline{\epsilon} \underline{\mathbf{E}}$$

As derived earlier, the wave equation is given by

$$\left(\nabla^2 + \omega^2 \underline{\epsilon} \right) \underline{\mathbf{E}} = 0$$

As we have seen, $\underline{\epsilon}$ is complex for a dissipative medium.

Note: The wave number and the intrinsic impedance are now **complex numbers**.

$$\underline{k}^2 = \omega^2 \underline{\epsilon}$$

;

$$\underline{\eta} = \sqrt{\mu / \underline{\epsilon}}$$

The wave number and the intrinsic impedance can also be written as

$$\underline{k} = k_R - jk_I$$

$$\underline{\eta} = |\eta|e^{j\phi}$$

The electromagnetic fields of a uniform plane wave in a dissipative medium are given by

$$\underline{\mathbf{E}} = \hat{x}E_0e^{-j\underline{k}z}$$

$$\underline{\mathbf{H}} = \hat{y}\frac{E_0e^{-j\underline{k}z}}{\underline{\eta}}$$

The electromagnetic fields can also be written as

$$\underline{\mathbf{E}} = \hat{x} E_0 e^{-k_I z} e^{-jk_R z}$$

$$\underline{\mathbf{H}} = \hat{y} \frac{E_0}{|\eta|} e^{-k_I z} e^{-jk_R z} e^{-j\phi}$$

Or in the time domain

$$E_x(z, t) = E_0 e^{-k_I z} \cos(\omega t - k_R z)$$

$$H_y(z, t) = \frac{E_0 e^{-k_I z} \cos(\omega t - k_R z - \phi)}{|\eta|}$$

From the electromagnetic fields we can observe that

- 1) The **wave travels** in the $+\hat{z}$ direction with a velocity

$$v = \frac{\omega}{k_R}$$

where k_R is now the wavenumber.

- 2) The **amplitude is attenuated** exponentially at the rate k_I nepers per meter, where k_I is the attenuation constant.
- 3) The magnetic field H_y is **out of phase** by ϕ .

-One neper of attenuation defined as

$$\ln \left[\frac{\textit{Amplitude}_{end}}{\textit{Amplitude}_{start}} \right] = -1$$

-The attenuation in nepers after length d is given by

$$\textit{Attenuation}[\textit{nepers}] = \ln \left[\frac{E_0 e^{-k_I(z+d)}}{E_0 e^{-k_I z}} \right] = -k_I d$$

-The relationship between dB and nepers is given by

$$1[\textit{neper}] = 8.686[\textit{dB}]$$

1) The electric field is decreased by a factor of 0.707.
Find the attenuation in nepers and dB

$$\ln \left[\frac{E_F}{E_I} \right] = \ln [0.707] = -0.3467 \text{ [nepers]}$$

$$-0.3467 \text{ [nepers]} \times 8.686 \left[\frac{\text{dB}}{\text{nepers}} \right] = -3.01 \text{ [dB]}$$

or

$$20 \log \left(\frac{E_F}{E_I} \right) = 20 \log (0.707) = -3.01 \text{ [dB]}$$

If dealing with electric field use

$$20\log\left[\frac{E_F}{E_I}\right]$$

If dealing with power use

$$10\log\left[\frac{P_F}{P_I}\right]$$

This is because $P \sim E^2$

when $E_F = 0.707E_I$

then $P_F = 0.707^2 P_I \Rightarrow P_F = 0.5P_I$

$$20\log[0.707] = 10\log[0.5] = -3.01 \text{ [dB]}$$

The penetration depth (d_p) such that $\left|E_{(z=d_p)}\right| = \left(\frac{1}{e}\right) \left|E_{(z=0)}\right|$ is given by

$$k_I d_p = 1$$

Where for a conducting media

$$\tilde{k} = \omega \sqrt{\mu \epsilon \left[1 - j \frac{\sigma}{\omega \epsilon} \right]} = \omega \sqrt{\mu \epsilon} \sqrt{1 - j \frac{\sigma}{\omega \epsilon}} = k_R - j k_I$$

Keep in mind that

If $a \gg 1$ then

$$\sqrt{1 + ja} \approx \sqrt{\frac{a}{2}} (1 + j)$$

or

If $a \ll 1$ then

$$\sqrt{1 + ja} \approx 1 + j \frac{a}{2}$$

(Good Dielectric) $\frac{\sigma}{\omega\epsilon} \ll 1$

If $a \ll 1$ then
 $\sqrt{1 + ja} \approx 1 + j\frac{a}{2}$



k approximation for
good dielectric



http://www.hamprods.com/Other_Products.htm

$$\underline{k} \approx \omega\sqrt{\mu\epsilon} \left[1 - j\frac{\sigma}{2\omega\epsilon} \right]$$

$$\underline{k} = k_R - jk_I \quad ;$$

$$k_I = \frac{\sigma}{2} \sqrt{\frac{\mu}{\epsilon}}$$

$$d_p = \frac{2}{\sigma} \sqrt{\frac{\epsilon}{\mu}} \quad ;$$

$$k_R = \omega\sqrt{\mu\epsilon}$$

(Good Conductor) $\frac{\sigma}{\omega \epsilon} \gg 1$

If $a \gg 1$ then
 $\sqrt{1 + ja} \approx \sqrt{\frac{a}{2}}(1 + j)$

$$\underline{k} \approx \sqrt{\frac{\omega \mu \sigma}{2}}(1 - j)$$

$\underline{k}$ approximation
for good conductor




http://www.hamprods.com/Other_Products.htm

$$\underline{k} = k_R - jk_I \quad ; \quad k_I = \sqrt{\frac{\omega \mu \sigma}{2}}$$

$$d_p = \sqrt{\frac{2}{\omega \mu \sigma}} \equiv \delta \quad ; \quad k_R = \sqrt{\frac{\omega \mu \sigma}{2}}$$

δ Also called the skin depth

Behavior of k_I and k_R as a Function of $\frac{\sigma}{\omega\epsilon}$

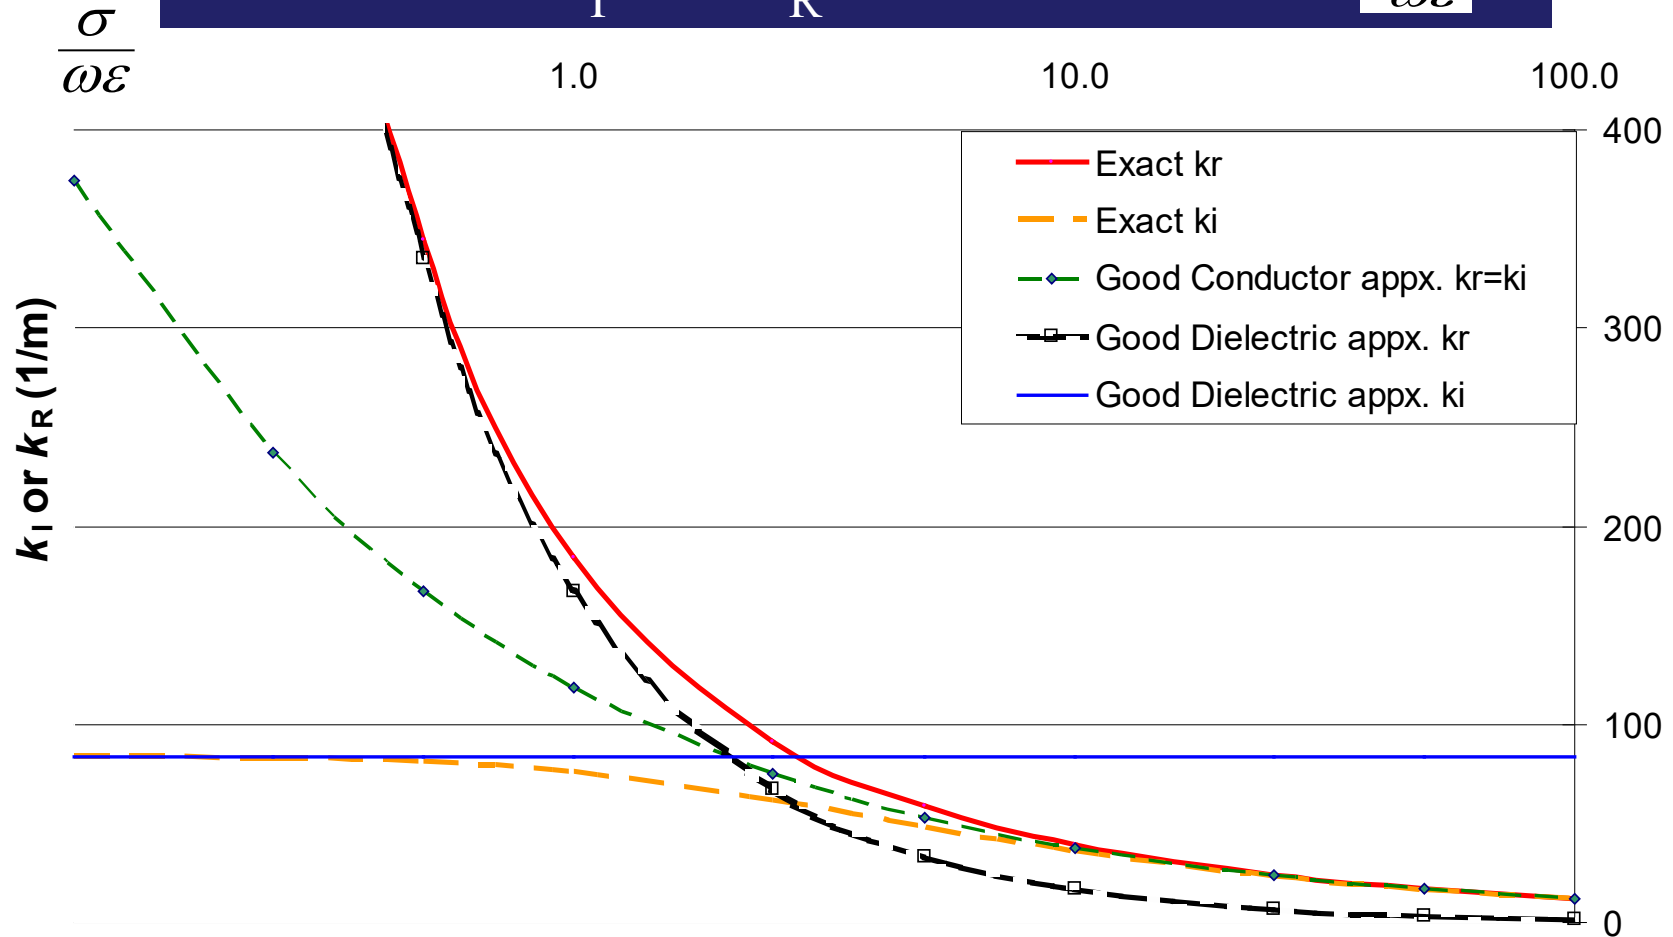

Seawater

$$\mu = \mu_0 \quad ; \quad \epsilon = 81\epsilon_0 \quad ; \quad \sigma = 4 \left[\frac{\text{mho}}{\text{m}} \right]$$

OHM'S LAW

$$\underline{\mathbf{J}} = \sigma \underline{\mathbf{E}} \Rightarrow \sigma \rightarrow \infty$$

Ordinary metal with very high values of σ approximate “perfect” conductors

Superconducting lead	$\sigma = 2.7 \times 10^{20}$	[mho/m]
Silver	$\sigma = 6.2 \times 10^7$	[mho/m]
Copper	$\sigma = 5.8 \times 10^7$	[mho/m]
Gold	$\sigma = 4.1 \times 10^7$	[mho/m]
Aluminum	$\sigma = 3.8 \times 10^7$	[mho/m]
Brass	$\sigma = 1.5 \times 10^7$	[mho/m]
Solder	$\sigma = 0.7 \times 10^7$	[mho/m]
Stainless steel	$\sigma = 0.1 \times 10^7$	[mho/m]
Graphite	$\sigma = 7 \times 10^4$	[mho/m]
Silicon	$\sigma = 1.2 \times 10^3$	[mho/m]
Sea water	$\sigma = 4$	[mho/m]
Distilled water	$\sigma = 2 \times 10^{-4}$	[mho/m]
Sandy soil	$\sigma = 10^{-5}$	[mho/m]
Granite	$\sigma = 10^{-6}$	[mho/m]
Bakelite	$\sigma = 10^{-9}$	[mho/m]
Diamond	$\sigma = 2 \times 10^{-13}$	[mho/m]
Polystyrene	$\sigma = 10^{-16}$	[mho/m]
Quartz	$\sigma = 10^{-17}$	[mho/m]

A perfect conductor is an idealized material in which **no** electric field can exists

Can dissipate energy in oscillations of bound charge in a dielectric.

Can define an effective conductivity

$$\sigma_e = \omega \varepsilon''$$

Same effect as σ but from a different source

Table gives $[\tan \delta] = \frac{\varepsilon''}{\varepsilon'} = \frac{\sigma_e}{\omega \varepsilon'}$


	$\frac{\varepsilon'}{\varepsilon_0} = \varepsilon_r$	$\tan \delta$
Ice	4.2	0.1
Dry soil	2.8	0.07
Distilled water	80	0.04
Nylon	4	0.01
Teflon	2	0.0003
Glass	4 $\rightarrow$ 7	0.0002
Dry wood	1.5 $\rightarrow$ 4	0.01
Styrofoam	1.03	0.00003
Steak	40	0.3

$$\mathbf{D} = \tilde{\varepsilon} \mathbf{E}$$

$$\tilde{\varepsilon} = \varepsilon' - j\varepsilon''$$

*Phase Lag
caused by bound
charge not
“keeping up” with
 $\mathbf{E}$ Field*

The skin effect is the tendency of an **alternating electric current** to distribute itself within a **conductor** so that the current density near the surface of the conductor is greater than that at its core. That is, the electric current tends to flow at the "**skin**" of the conductor.

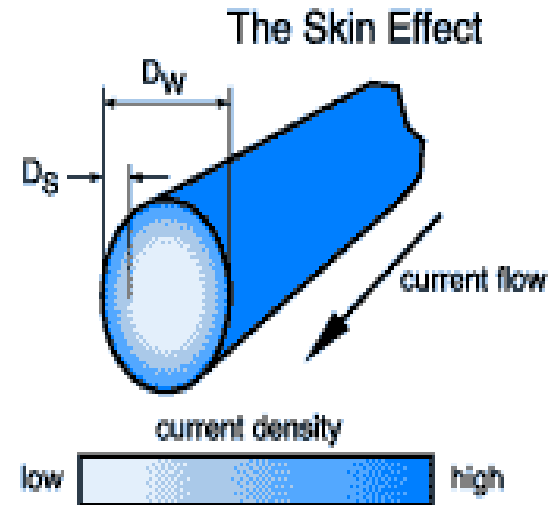

http://www.ee.surrey.ac.uk/Workshop/advice/coils/power_loss.html

For EM waves

$$\underline{\underline{\mathbf{E}}} = \hat{\mathbf{x}} E_0 e^{-k_I z} e^{-jk_R z}$$

Since $\underline{\underline{\mathbf{J}}} = \sigma \underline{\underline{\mathbf{E}}}$

$$\underline{\underline{\mathbf{J}}} = \hat{\mathbf{x}} \sigma E_0 e^{-k_I z} e^{-jk_R z}$$

Current is exponentially damped into material

Plane Waves in a Plasma

Plasma is a collection of (+) and (-) charged particles for which $\langle \rho_v \rangle = 0$

For low density plasma (few collisions)

$$\mu = \mu_0 \quad ; \quad \varepsilon = \varepsilon_0 \left[1 - \frac{\omega_p^2}{\omega^2} \right] \quad \omega_p \rightarrow \text{Plasma freq.}$$


"Cold Plasma"

Note: ε is a function of $\omega \Rightarrow$ Dispersive medium

For $\omega > \omega_p$

$$k = \omega \sqrt{\mu_0 \varepsilon_0} \left[1 - \frac{\omega_p^2}{\omega^2} \right]^{\frac{1}{2}}$$

$$v = \frac{\omega}{k}$$

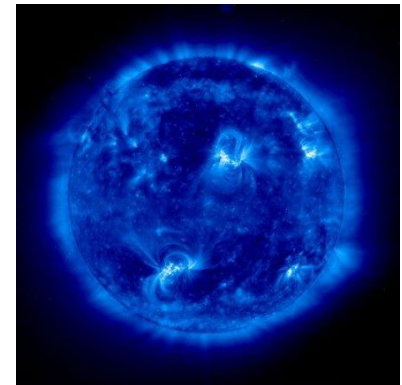

Plane Waves in a Plasma

For $\omega < \omega_p$ the wavenumber becomes imaginary

$$\underline{k} = -j\alpha = -j\omega\sqrt{\mu_0\epsilon_0} \left[\frac{\omega_p^2}{\omega^2} - 1 \right]^{\frac{1}{2}}$$

Then $\underline{E}(z) = \hat{x}E_0e^{-j\underline{k}z} = \hat{x}E_0e^{-\alpha z}$


and $\underline{H}(z) = \hat{y}\frac{\alpha}{j\omega\mu_0}E_0e^{-\alpha z}$

Since $\underline{E} \times \underline{H}$ is imaginary

$$\langle \mathbf{S} \rangle = \frac{1}{2} \text{Re} \left[\underline{E} \times \underline{H}^* \right] = 0$$

Evanescent Waves

Attenuation occurs
but **no** real power is
dissipated

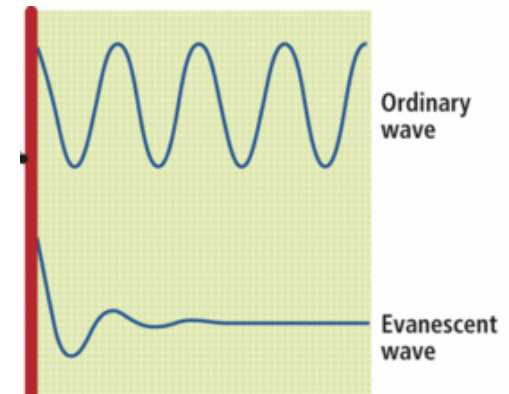


Phase vs. Group Velocity

3-53

The **phase velocity** is the speed of the individual wave crests, whereas the **group velocity** is the speed of the wave packet as a whole (the envelope).

In this case, the phase velocity is greater than the group velocity.

(Roller coaster, beach waves, inch worm)

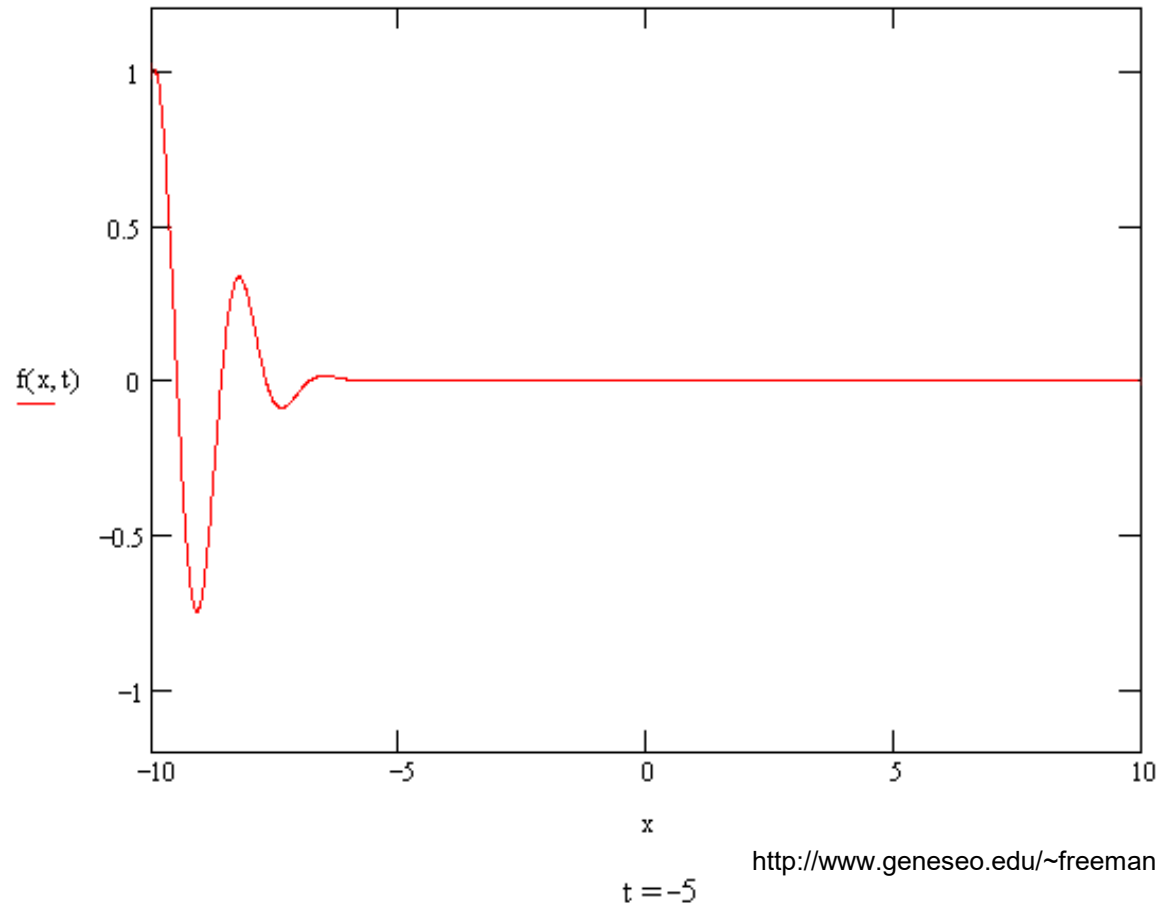


$$\text{Phase Velocity} = (v_p) = \frac{\omega}{k_0}$$

$$\text{Group Velocity} = (v_g) = \frac{\delta\omega}{\delta k}$$


Phase vs. Group Velocity

3-54


phase vel. = group vel.

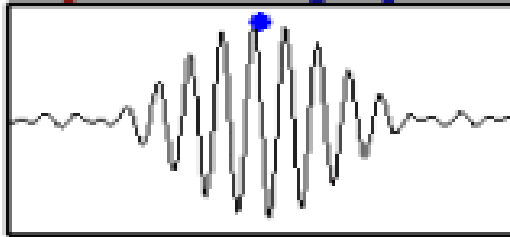


phase vel. = - group vel.

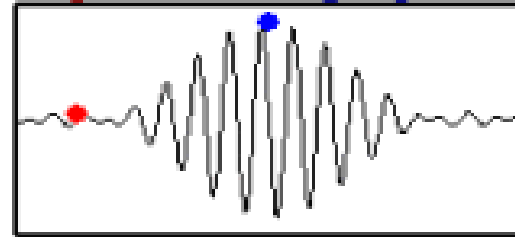


phase vel. > group vel.

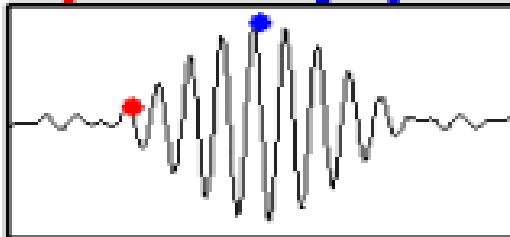

phase vel. < group vel.

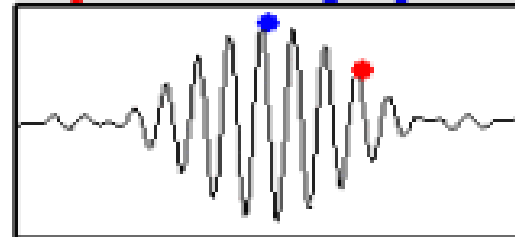

group vel. = 0

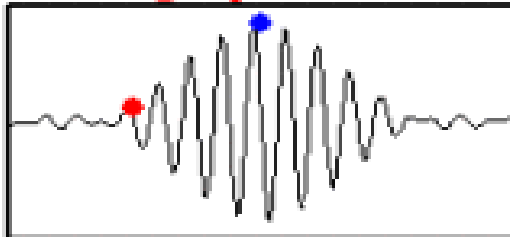

phase vel. = 0

